

LUBBOCK COUNTY
Woodrow Road Phase 2 – SLIDE ROAD TO INDIANA AVE
ITB 250801

Addendum No. 3

This addendum forms part of the contract documents referenced above and modifies the original Contract Documents. Acknowledge receipt of this addendum by signing and attaching it to the Contract Documents (inside). Note receipt of the Addendum in the Bid Proposal and on the outer envelope of your bid.

General Question Clarifications

1. County's Estimated Budget
 - Woodrow Road Phase 2 - \$29,589,578
 - CR 2330 - \$3,250,000
2. Monthly Payment
 - Monthly Contractor Pay Applications require Commissioner Court approval. Specific timelines regarding estimate cut offs and payment approval dates will be determined prior to construction.
3. Driveway 22
 - Driveway 22 is currently under construction by others. Design plans have been shared and coordinated for this project, and it is expected to tie to the Woodrow Phase 2 left gutter line. Current quantities do not include curb and gutter at this location because that will be constructed by others.
4. CR 2330 Easement #3 Embankment question
 - Confirmed all channel grading is in cut. There is a proposed HGL line that goes above the existing grade, but all proposed work is accounted for in the excavation quantities. The survey files can be provided after the bid is awarded.

ITB/Project Manual Clarifications/Changes

5. Pricing Sheet
 - Added Item 48A – 0506 6020 – CONSTRUCTION EXITS (INSTALL)(TY 2)

Plans Clarifications/Changes

1. E&Q – SHEET 17, 17A – 17C
 - Added Item 0506 6020 – CONSTRUCTION EXITS (INSTALL)(TY 2)
2. CR 2330 EASEMENT #2 GRADING LAYOUT – SHEET 169
 - Corrected incorrect plan view elevation to match profile elevation.
3. EROSION CONTROL PLAN SUMMARY – SHEET 243
 - Added Item 0506 6020 – CONSTRUCTION EXITS (INSTALL)(TY 2)



CONTRACTOR: _____
(typed or printed)

By: _____
(signature)

Date: _____

By: _____
(typed or printed)

Title: _____
(typed or printed)

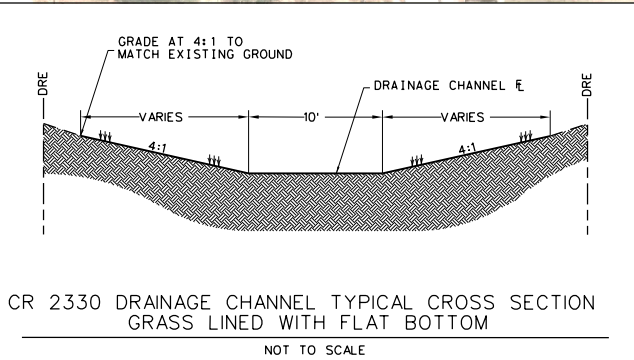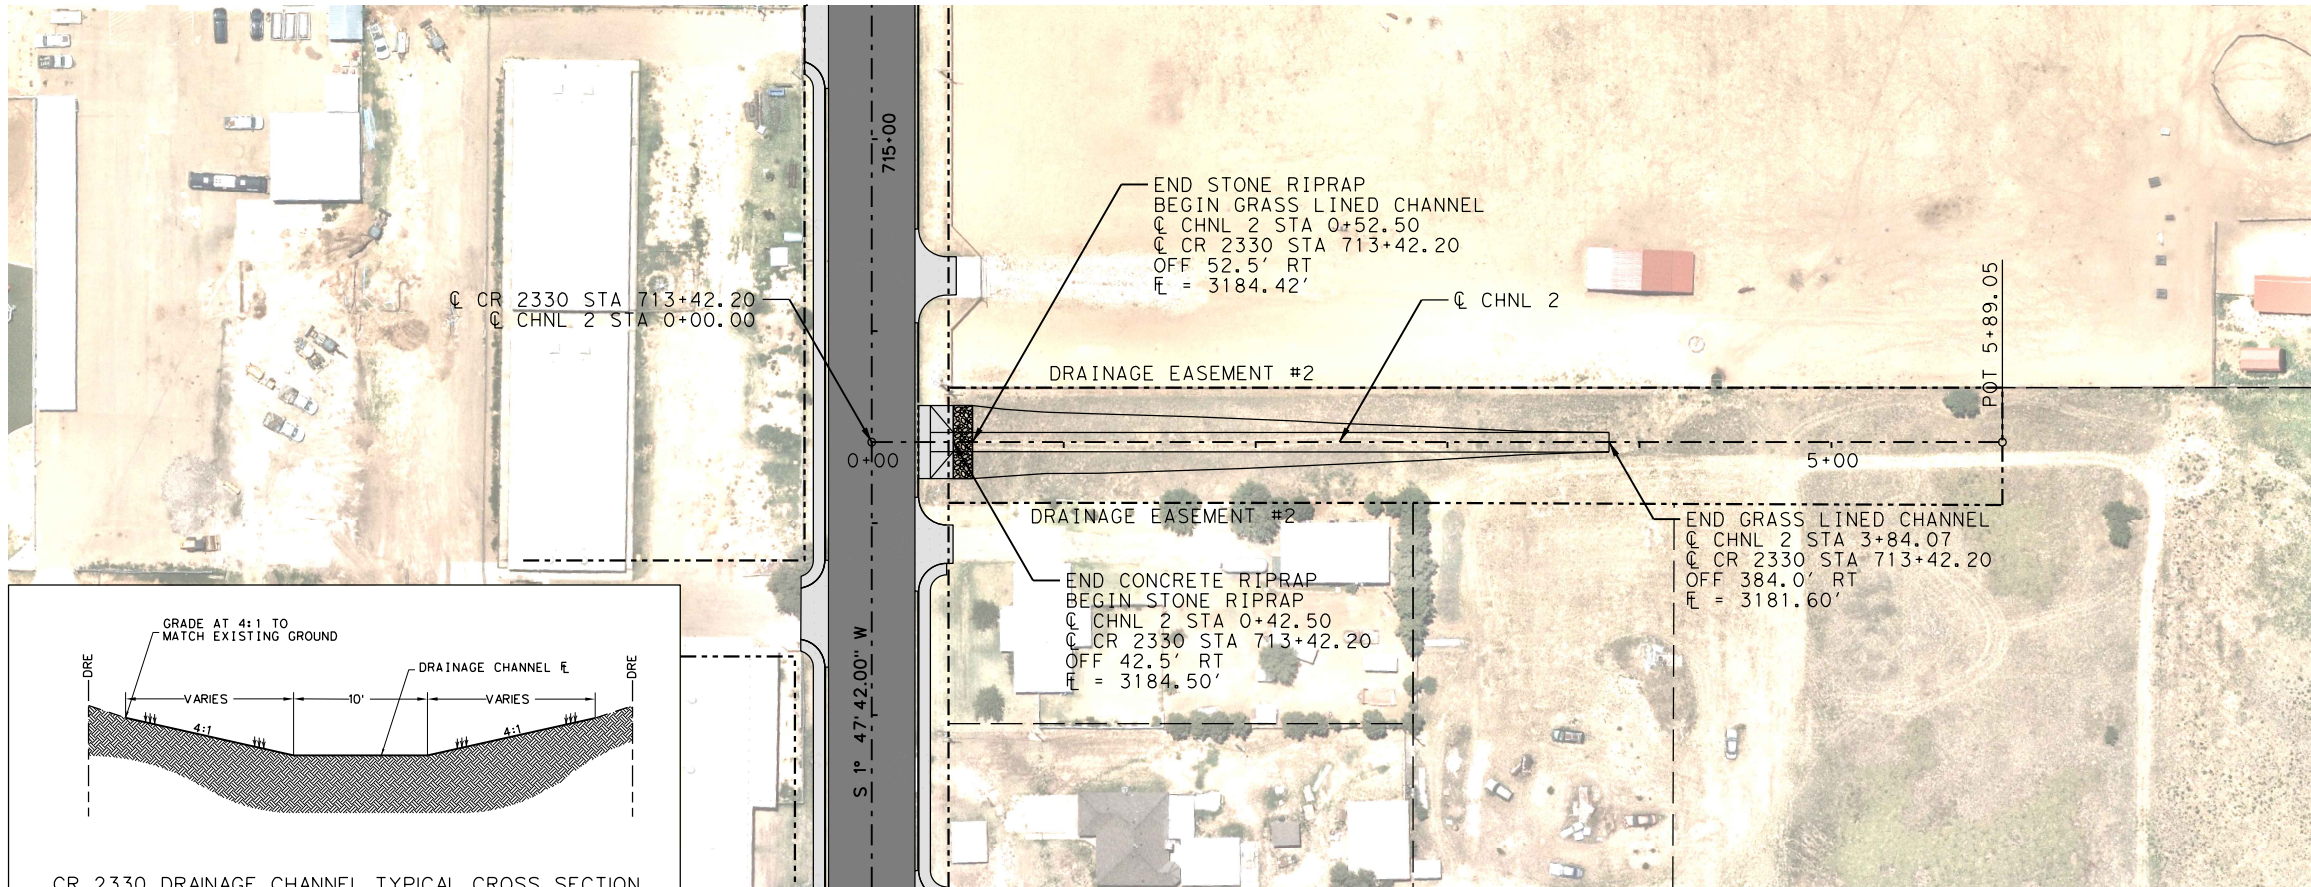


LEGEND

	PROPOSED CONCRETE
	PROPOSED ASPHALT

- NOTES:
1. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE CURRENT VERSION OF TEXAS DEPARTMENT OF TRANSPORTATION STANDARDS AND SPECIFICATIONS.
 2. USE 4" CONCRETE RIPRAP UNLESS SPECIFIED OTHERWISE.
 3. ALL CONCRETE SHALL BE PLACED ON PROCESSED AND COMPACTED SUBGRADE.
 4. REFER TO ROADWAY PLAN AND PROFILE SHEETS FOR MORE DETAILED INFORMATION ABOUT THE PROPOSED ROADWAY IMPROVEMENTS.

FILENAME: c:\pwwork1\00116325\WDR2_ESMT_02.dgn
PLOTED: 10/27/2025 12:46:47 PM

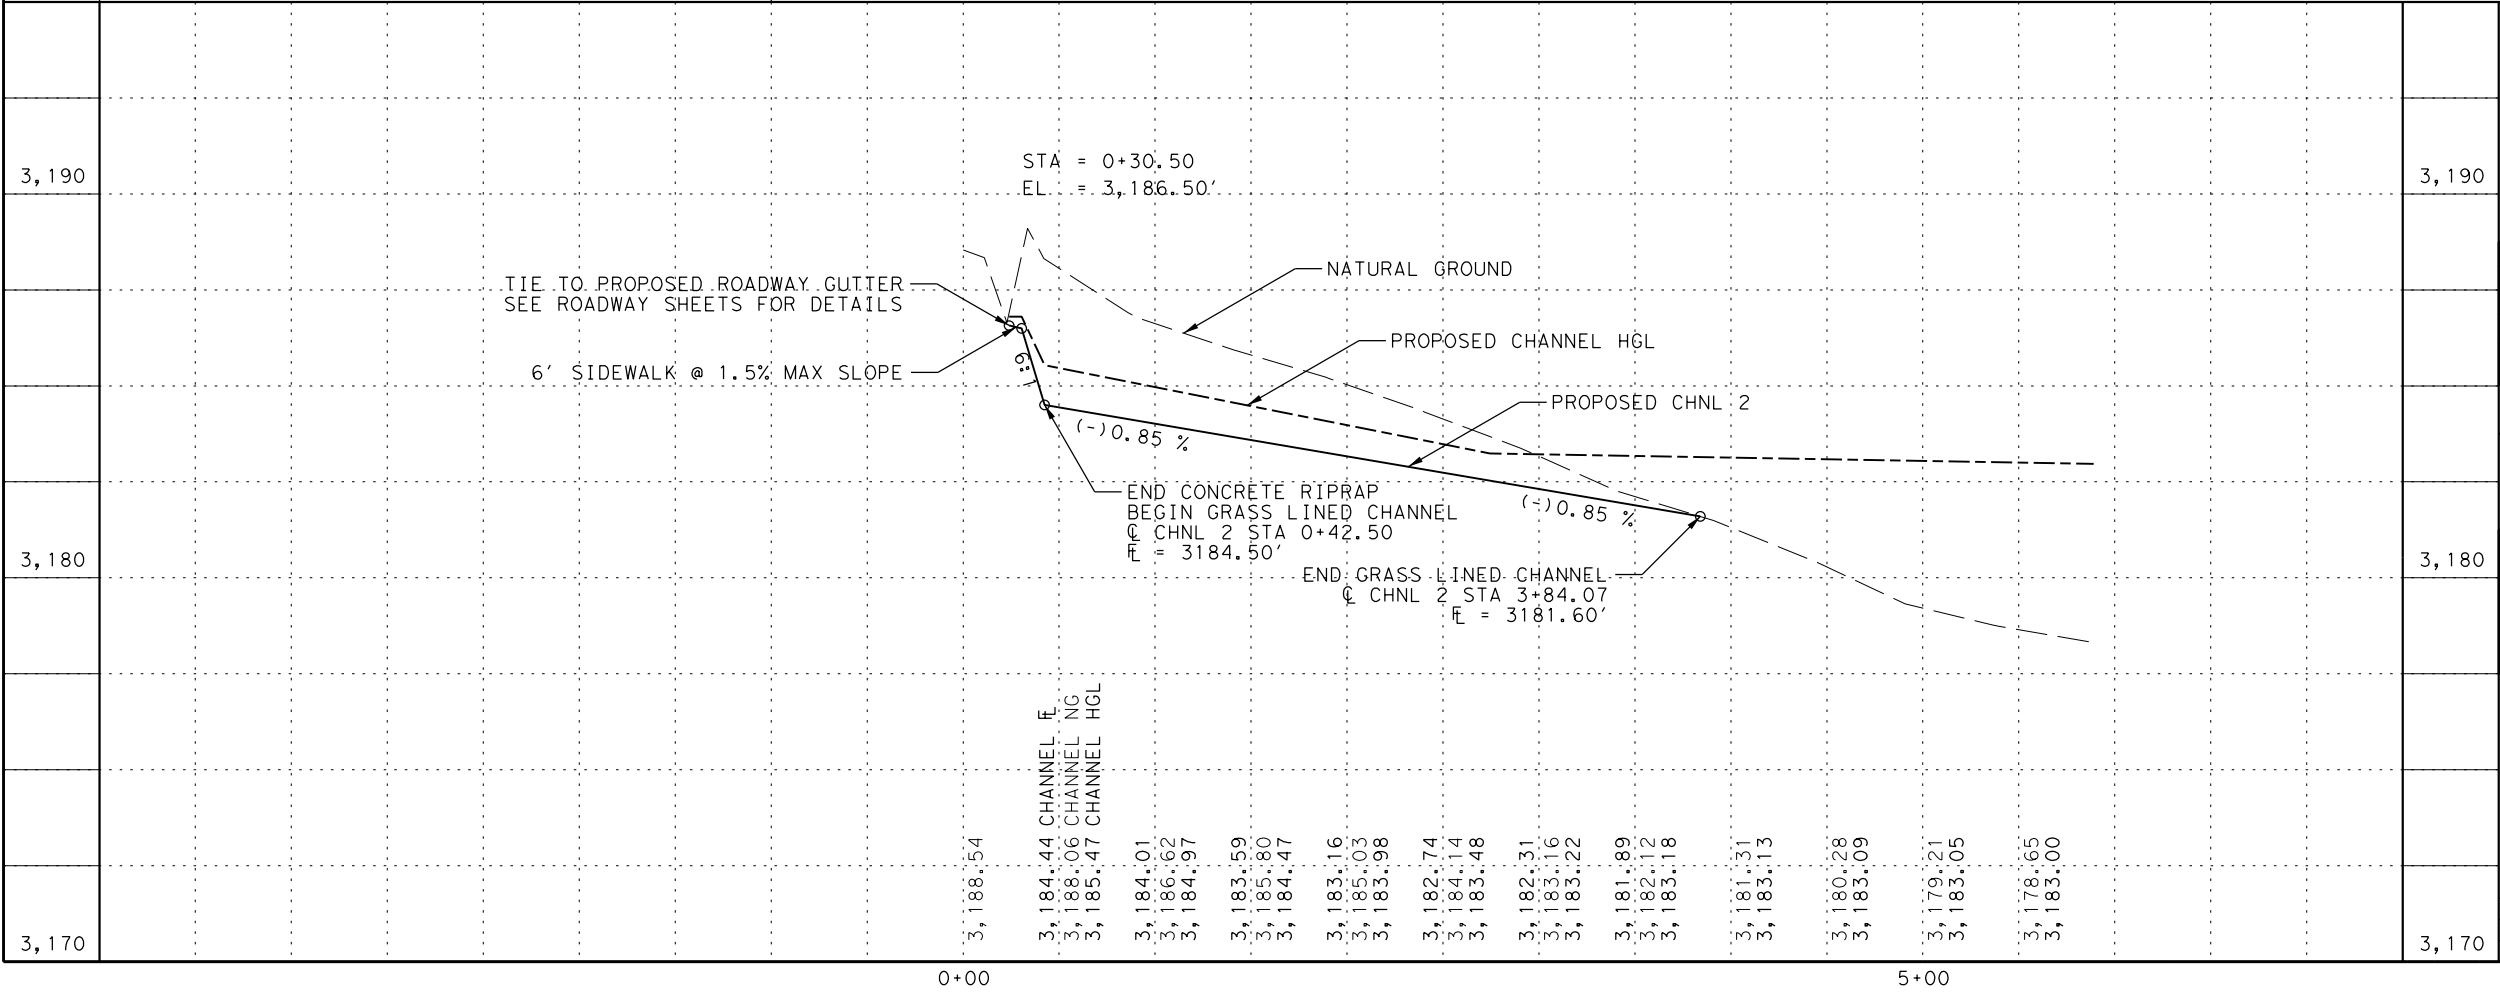

1	Addendum No. 3	JH	10/27/2025
---	----------------	----	------------

**WOODROW ROAD
FM 1730 TO CR 2100**

**CR 2330 EASEMENT
GRADING LAYOUTS**

DRAINAGE EASEMENT #2

SHEET 2 OF 3

DATE: 10/27/2025	CHECKED: PTC	169
DESIGN: BJB	KHA NO:	
DRAWN: BJB	COUNTY NO:	

FILENAME: c:\pwwork1\00116332\WDR2_ECP_SUM.dgn
PLOTTED: 10/24/2025 9:49:28 AM

SUMMARY OF EROSION CONTROL ITEMS										
	0160 6003 FURNISHING AND PLACING TOPSOIL (4")	0164 6021 CELL FBR MLCH SEED (PERM) (RURAL) (SANDY)	0164 6029 CELL FBR MLCH SEED (TEMP) (WARM)	0164 6031 CELL FBR MLCH SEED (TEMP) (COOL)	0166 6001 FERTILIZER	0168 6001 VEGETATIVE WATERING	0506 6002 ROCK FILTER DAMS (INSTALL) (TY 2)	0506 6011 ROCK FILTER DAMS (REMOVE)	0506 6024 CONSTRUCTION EXITS (REMOVE)	0506 6042 BIODEG EROSN CONT LOGS (INSTALL) (18")
STATIONING	SY	SY	SY	SY	AC	MG	LF	LF	SY	LF
BEGIN PROJECT TO STA 1056+00					0.0	0.0				
STA 1056+00 TO STA 1068+00	9991	9991	4996	4996	2.1	168.1				440
STA 1068+00 TO STA 1080+00	4986	4986	2493	2493	1.0	83.9				320
STA 1080+00 TO STA 1092+00	5518	5518	2759	2759	1.1	92.9	50	50		40
STA 1092+00 TO STA 1104+00	4823	4823	2412	2412	1.0	81.2				
STA 1104+00 TO STA 1116+00	4604	4604	2302	2302	1.0	77.5				60
STA 1116+00 TO STA 1128+00	3905	3905	1953	1953	0.8	65.7				
STA 1128+00 TO STA 1140+00	4114	4114	2057	2057	0.9	69.2				
STA 1140+00 TO STA 1152+00	4389	4389	2195	2195	0.9	73.9	30	30		20
STA 1152+00 TO END PROJECT	4635	4635	2318	2318	1.0	78.0				60
NORTH FM 1730 (SLIDE RD)	1367	1367	684	684	0.3	23.0				60
SOUTH FM 1730 (SLIDE RD)	1913	1913	957	957	0.4	32.2				70
NORTH CR 2000 (QUAKER AVE)					0.0	0.0				
PROJECT TOTAL	50245	50245	25123	25123	10.4	845.6	80	80	500	1070

CR 2330 QUANTITIES										
CR 2330 STA 700+00 TO STA 708+00	2977	2977	1488.5	1488.5	0.6	50.1	0	0		260
CR 2330 STA 708+00 TO END	4227	4227	2113.5	2113.5	0.9	71.1	0	0		151
CR 2330 TOTAL	7204	7204	3602	3602	1	121	0	0	0	411

SUMMARY OF EROSION CONTROL ITEMS			
	0506 6042 BIODEG EROSN CONT LOGS (INSTALL) (18")	0506 6043 BIODEG EROSN CONT LOGS (REMOVE)	0730 6107 FULL - WIDTH MOWING
STATIONING	LF	LF	CYC
BEGIN PROJECT TO STA 1056+00			
STA 1056+00 TO STA 1068+00	440	440	
STA 1068+00 TO STA 1080+00	320	320	
STA 1080+00 TO STA 1092+00	40	40	
STA 1092+00 TO STA 1104+00		0	
STA 1104+00 TO STA 1116+00	60	60	
STA 1116+00 TO STA 1128+00		0	
STA 1128+00 TO STA 1140+00		0	
STA 1140+00 TO STA 1152+00	20	20	
STA 1152+00 TO END PROJECT	60	60	
NORTH FM 1730 (SLIDE RD)	60	60	
SOUTH FM 1730 (SLIDE RD)	70	70	
NORTH CR 2000 (QUAKER AVE)			
PROJECT TOTAL	1070	1070	2

CR 2330 QUANTITIES			
CR 2330 STA 700+00 TO STA 708+00	260	260	
CR 2330 STA 708+00 TO END	151	151	
CR 2330 TOTAL	411	411	

No.	Description	By	Date
1	Addendum No. 3	KB	10/24/2025



F - 928



HUGO REED
AND ASSOCIATES, INC.
TEXAS REGISTERED ENGINEERING FIRM F-790 TEXAS LICENSED SURVEYING FIRM 100676400



WOODROW ROAD
FM 1730 TO CR 2100

EROSION CONTROL
PLAN SUMMARY

SHEET 1 OF 1

DATE: 10/24/2025	CHECKED: PTC	243
DESIGN: BJB	KHA NO:	
DRAWN: BJB	COUNTY NO:	

No.	Description	By	Date
1	Addendum No. 2	KB	10/22/2025
2	Addendum No. 3	KB	10/24/2025

FILENAME: c:\pwwork1\00116319\WDR2_EQ_01.dgn
PLOTTED: 9/27/2025 9:43:43 AM

ESTIMATE SUMMARY																
						Project:		A L T	ITEM- CODE			DESCRIPTION	U N I T	TOTAL		
				CSJ: 0905-06-115												
				Highway: CS												
				County: LUBBOCK												
EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL	ITEM NO	DESC CODE	SP NO			EST.		FINAL	
						123.000		0100	6002			PREPARING ROW	STA	123.000		
						4.000		0100	6006			PREP ROW (TREE) (LESS THAN 24" DIA)	EA	4.000		
						6.000		0100	6007			PREP ROW (TREE) (GREATER THAN 24" DIA)	EA	6.000		
						998.000		0104	6001			REMOVING CONC (PAV)	SY	998.000		
						13.000		0104	6009			REMOVING CONC (RIPRAP)	SY	13.000		
						4322.000		0104	6017			REMOVING CONC (DRIVEWAYS)	SY	4322.000		
						218.000		0104	6022			REMOVING CONC (CURB AND GUTTER)	LF	218.000		
						81054.000		0110	6001			EXCAVATION (ROADWAY)	CY	81054.000		
						5697.000		0110	6002			EXCAVATION (CHANNEL)	CY	5697.000		
						375.000		0132	6006			EMBANKMENT (FINAL) (DENS CONT) (TY C)	CY	375.000		
						50245.000		0160	6003			FURNISHING AND PLACING TOPSOIL (4")	SY	50245.000		
						50245.000		0164	6021			CELL FBR MLCH SEED (PERM) (RURAL) (SANDY)	SY	50245.000		
						25122.500		0164	6029			CELL FBR MLCH SEED (TEMP) (WARM)	SY	25122.500		
						25122.500		0164	6031			CELL FBR MLCH SEED (TEMP) (COOL)	SY	25122.500		
						3.280		0164	6034			DRILL SEEDING (PERM) (RURAL) (SANDY)	AC	3.280		
						10.381		0166	6001			FERTILIZER	AC	10.381		
						845.623		0168	6001			VEGETATIVE WATERING	MG	845.623		
						11410.000		0169	6007			SOIL RETENTION BLANKETS (CL 2) (TY G)	SY	11410.000		
						85.000		0216	6001			PROOF ROLLING	HR	85.000		
						82791.000		0247	6204			FL BS (CMP IN PLC) (TY E GR 4) (8")	SY	82791.000		
						73.921		0275	6001			CEMENT	TON	73.921		
						8761.000		0275	6002			CEMENT TREAT (EXIST MATL) (6")	SY	8761.000		
						14649.000		0310	6009			PRIME COAT (MC-30)	GAL	14649.000		
						10986.750		0315	6004			FOG SEAL (CSS-1H)	GAL	10986.750		
						1300.000		0351	6013			FLEXIBLE PAVEMENT STRUCTURE REPAIR (4")	SY	1300.000		
						35244.000		0354	6005			PLAN & TEXT ASPH CONC PAV (2" TO 4")	SY	35244.000		
						6726.000		0360	6002			CONC PVMT (CONT REINF - CRCP) (8")	SY	6726.000		
						148.000		0360	6080			CONC PVMT (CRCP) (TRANSITION SLAB)	SY	148.000		
						36.000		0416	6002			DRILL SHAFT (24 IN)	LF	36.000		
						976.000		0432	6001			RIPRAP (CONC) (4 IN)	CY	976.000		
						47.000		0432	6002			RIPRAP (CONC) (5 IN)	CY	47.000		
						32.000		0432	6022			RIPRAP (STONE COMMON) (DRY) (6 IN)	CY	32.000		
						20.000		0432	6055			RIPRAP (STONE TY F) (DRY) (18")	CY	20.000		
						200.000		0460	6002			CMP (GAL STL 18 IN)	LF	200.000		
						70.000		0460	6003			CMP (GAL STL 24 IN)	LF	70.000		
						1332.000		0462	6099			CONC BOX CULV (6 FT X 2 FT)	LF	1332.000		
						1.000		0465	6012			JCTBOX (COMPL) (PJB) (8FTX8FT)	EA	1.000		
						1.000		0465	6128			INLET (COMPL) (PSL) (FG) (4FTX4FT-4FTX4FT)	EA	1.000		
						2.000		0467	6207			SET (TY I) (S= 6 FT) (HW= 3 FT) (6:1) (C)	EA	2.000		
						28.000		0467	6208			SET (TY I) (S= 6 FT) (HW= 3 FT) (6:1) (P)	EA	28.000		
						4.000		0467	6346			SET (TY II) (18 IN) (CMP) (4: 1) (P)	EA	4.000		
						4.000		0467	6377			SET (TY II) (24 IN) (CMP) (4: 1) (C)	EA	4.000		
						16.000		0480	6001			CLEAN EXIST CULVERTS	EA	16.000		
						10.000		0496	6016			REMOV STR (PIPE)	EA	10.000		
						80.000		0506	6002			ROCK FILTER DAMS (INSTALL) (TY 2)	LF	80.000		
						80.000		0506	6011			ROCK FILTER DAMS (REMOVE)	LF	80.000		
						500.000		0506	6020			CONSTRUCTION EXITS (INSTALL) (TY 1)	SY	500.000		
						500.000		0506	6024			CONSTRUCTION EXITS (REMOVE)	SY	500.000		

No.	Description	By	Date
1	ADDENDUM 1	KB	10/16/2025
2	ADDENDUM No. 3	KB	10/24/2025

FILENAME: c:\pwwork1\00116319\WDR2_E02.dgn
PLOTTED: 9/27/2025 9:43:46 AM

ESTIMATE SUMMARY																
						Project:		A L T	ITEM- CODE			DESCRIPTION	U N I T	TOTAL		
						CSJ: 0905-06-115			ITEM NO	DESC CODE	SP NO					
						Highway: CS										
						County: LUBBOCK										
EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL						EST.		FINAL	
						1070.000			0506	6042		BIODEG EROSN CONT LOGS (INSTL) (18")	LF	1070.000		
						1070.000			0506	6043		BIODEG EROSN CONT LOGS (REMOVE)	LF	1070.000		
						36990.000			0508	6001		CONSTRUCTING DETOURS	SY	36990.000		
						17915.000			0529	6008		CONC CURB & GUTTER (TY II)	LF	17915.000		
						618.000			0529	6012		CONC CURB (SLOTTED)	LF	618.000		
						270.000			0529	6021		CONC CURB & GUTTER (SLOTTED)	LF	270.000		
						80.000			0529	6030		CONC CURB & GUTTER (VALLEY GUTTER)	LF	80.000		
						94.000			0530	6001		INTERSECTIONS (CONC)	SY	94.000		
						8587.000			0530	6004		DRIVEWAYS (CONC)	SY	8587.000		
						770.000			0530	6007		TURNOUTS (CONC)	SY	770.000		
						2600.000			0531	6001		CONC SIDEWALKS (4")	SY	2600.000		
						2.000			0531	6013		CURB RAMPS (TY 10)	EA	2.000		
						522.000			0536	6002		CONC MEDIAN	SY	522.000		
						60.000			0560	6001		MAILBOX INSTALL-S (TWG-POST) TY 1	EA	60.000		
						20.000			0644	6001		IN SM RD SN SUP&AM TY10BWG(1)SA(P)	EA	20.000		
						4.000			0644	6002		IN SM RD SN SUP&AM TY10BWG(1)SA(P-BM)	EA	4.000		
						4.000			0644	6004		IN SM RD SN SUP&AM TY10BWG(1)SA(T)	EA	4.000		
						14.000			0644	6076		REMOVE SM RD SN SUP&AM	EA	14.000		
						5662.000			0666	6036		REFL PAV MRK TY I (W)8"(SLD)(100MIL)	LF	5662.000		
						935.000			0666	6042		REFL PAV MRK TY I (W)12"(SLD)(100MIL)	LF	935.000		
						443.000			0666	6306		RE PM W/RET REQ TY I (W)6"(BRK)(100MIL)	LF	443.000		
						5054.000			0666	6309		RE PM W/RET REQ TY I (W)6"(SLD)(100MIL)	LF	5054.000		
						4281.000			0666	6318		RE PM W/RET REQ TY I (Y)6"(BRK)(100MIL)	LF	4281.000		
						22421.000			0666	6321		RE PM W/RET REQ TY I (Y)6"(SLD)(100MIL)	LF	22421.000		
						592.000			0668	6018		PREFAB PAV MRK TY B (W)(24") (SLD)	LF	592.000		
						20.000			0668	6019		PREFAB PAV MRK TY B (W)(ARROW)	EA	20.000		
						2.000			0668	6020		PREFAB PAV MRK TY B (W)(DBL ARROW)	EA	2.000		
						280.000			0672	6007		REFL PAV MRKR TY I-C	EA	280.000		
						1714.000			0672	6009		REFL PAV MRKR TY II-A-A	EA	1714.000		
						1580.000			0678	6002		PAV SURF PREP FOR MRK (6")	LF	1580.000		
						901.000			0678	6004		PAV SURF PREP FOR MRK (8")	LF	901.000		
						112.000			0678	6006		PAV SURF PREP FOR MRK (12")	LF	112.000		
						334.000			0678	6008		PAV SURF PREP FOR MRK (24")	LF	334.000		
						6.000			0678	6009		PAV SURF PREP FOR MRK (ARROW)	EA	6.000		
						6.000			0685	6004		INSTL RDS D FLSH BCN ASSM (SOLAR PWRD)	EA	6.000		
						2.000			0730	6107		FULL -WIDTH MOWING	CYC	2.000		
						1.000			1020-1			TRAFFIC CONTROL	LS	1.000		
						16850.000			3076	6009		D-GR HMA TY-B PG70-28 (4")	TON	16850.000		
						8427.000			3076	6030		D-GR HMA TY C PG70-28 (2")	TON	8427.000		
						961.000			3076	6045		D-GR HMA TY-D PG70-28	TON	961.000		
						0.800		1	0104	6010		REMOVING CONC (RIPRAP)	CY	0.800		
						150.000		1	4026	6001		THERMOPLASTIC PIPE (18)(HDPE)	LF	150.000		
						150.000		1	1020-3			SLICK BORE (HDPE)(COMPLETE FURN AND INSTALL)	LF	150.000		
						1.000		1	1020-4			24" CATCH BASIN W/DOMED CAST IRON GRATE	EA	1.000		
												ASSEMBLY (COMPLETE)				
						1.500		1	0432	6001		4" CONC RIPRAP	CY	1.500		

No.	Description	By	Date
1	Addendum No. 2	KB	10/22/2025

FILENAME: c:\pwworkh1\cd0116319\WDR2_E03.dgn
PLOTTED: 9/27/2025 9:43:50 AM

ESTIMATE SUMMARY																
						Project:		A L T	ITEM- CODE			DESCRIPTION	U N I T	TOTAL		
				CSJ: 0905-06-115												
				Highway: CS												
				County: LUBBOCK												
EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL		ITEM NO	DESC CODE	SP NO			EST.		FINAL
						10.000		2	0100	6002		PREPARING ROW	STA	10.000		
						8.000		2	0104	6009		REMOVING CONC (RIPRAP)	SY	8.000		
						2247.000		2	0104	6017		REMOVING CONC (DRIVEWAYS)	SY	2247.000		
						8045.000		2	0110	6001		EXCAVATION (ROADWAY)	CY	8045.000		
						1810.000		2	0110	6002		EXCAVATION (CHANNEL)	CY	1810.000		
						127.000		2	0132	6006		EMBANKMENT (FINAL) (DENS CONT) (TY C)	CY	127.000		
						7204.000		2	0160	6003		FURNISHING AND PLACING TOPSOIL (4")	SY	7204.000		
						7204.000		2	0164	6021		CELL FBR MLCH SEED (PERM) (RURAL) (SANDY)	SY	7204.000		
						3602.000		2	0164	6029		CELL FBR MLCH SEED (TEMP) (WARM)	SY	3602.000		
						3602.000		2	0164	6031		CELL FBR MLCH SEED (TEMP) (COOL)	SY	3602.000		
						2.250		2	0164	6034		DRILL SEEDING (PERM) (RURAL) (SANDY)	AC	2.250		
						1.488		2	0166	6001		FERTILIZER	AC	1.488		
						121.243		2	0168	6001		VEGETATIVE WATERING	MG	121.243		
						12.000		2	0216	6001		PROOF ROLLING	HR	12.000		
						11680.193		2	0247	6204		FL BS (CMP IN PLC) (TY E GR 4) (8")	SY	11680.193		
						18.550		2	0275	6001		CEMENT	TON	18.550		
						2110.000		2	0275	6002		CEMENT TREAT (EXIST MATL) (6")	SY	2110.000		
						2043.800		2	0310	6009		PRIME COAT (MC-30)	GAL	2043.800		
						1532.850		2	0315	6004		FOG SEAL (CSS-1H)	GAL	1532.850		
						650.000		2	0351	6013		FLEXIBLE PAVEMENT STRUCTURE REPAIR (4")	SY	650.000		
						6229.000		2	0354	6005		PLAN & TEXT ASPH CONC PAV (2" TO 4")	SY	6229.000		
						1690.000		2	0360	6002		CONC PVMT (CONT REINF - CRCP) (8")	SY	1690.000		
						31.000		2	0360	6080		CONC PVMT (CRCP) (TRANSITION SLAB)	SY	31.000		
						22.000		2	0432	6001		RIPRAP (CONC) (4 IN)	CY	22.000		
						63.000		2	0432	6055		RIPRAP (STONE TY F) (DRY) (18")	CY	63.000		
						90.000		2	0464	6017		RC PIPE (CL IV) (18 IN)	LF	90.000		
						8.000		2	0479	6001		ADJUSTING MANHOLES	EA	8.000		
						14.000		2	0496	6016		REMOV STR (PIPE)	EA	14.000		
						411.000		2	0506	6042		BIODEG EROSN CONT LOGS (INSTL) (18")	LF	411.000		
						411.000		2	0506	6043		BIODEG EROSN CONT LOGS (REMOVE)	LF	411.000		
						3396.000		2	0529	6008		CONC CURB & GUTTER (TY II)	LF	3396.000		
						114.000		2	0529	6021		CONC CURB & GUTTER (SLOTTED)	LF	114.000		
						109.000		2	0529	6030		CONC CURB & GUTTER (VALLEY GUTTER)	LF	109.000		
						2106.000		2	0530	6004		DRIVEWAYS (CONC)	SY	2106.000		
						1855.000		2	0531	6001		CONC SIDEWALKS (4")	SY	1855.000		
						2.000		2	0531	6005		CURB RAMPS (TY 2)	EA	2.000		
						59.000		2	0536	6002		CONC MEDIAN	SY	59.000		
						7.000		2	0560	6001		MAILBOX INSTALL-S (TWG-POST) TY 1	EA	7.000		
						4.000		2	0644	6001		IN SM RD SN SUP&AM TY10BWG (1) SA (P)	EA	4.000		
						532.000		2	0666	6036		REFL PAV MRK TY I (W) 8" (SLD) (100MIL)	LF	532.000		
						118.000		2	0666	6042		REFL PAV MRK TY I (W) 12" (SLD) (100MIL)	LF	118.000		
						200.000		2	0666	6309		RE PM W/RET REQ TY I (W) 6" (SLD) (100MIL)	LF	200.000		
						780.000		2	0666	6318		RE PM W/RET REQ TY I (Y) 6" (BRK) (100MIL)	LF	780.000		
						3116.000		2	0666	6321		RE PM W/RET REQ TY I (Y) 6" (SLD) (100MIL)	LF	3116.000		
						38.000		2	0668	6018		PREFAB PAV MRK TY B (W) (24") (SLD)	LF	38.000		
						31.000		2	0668	6019		PREFAB PAV MRK TY B (W) (ARROW)	EA	31.000		
						313.000		2	0672	6009		REFL PAV MRKR TY II-A-A	EA	313.000		
						529.000		2	0678	6004		PAV SURF PREP FOR MRK (8")	LF	529.000		

ESTIMATE SUMMARY

[illegible]

PRICING SHEET - Addendum No. 3

PROJECT	WOODROW PHASE II - SLIDE ROAD TO INDIANA AVENUE
PROPOSER NAME	
DATE	

ITEM NO.	PROJECT MANUAL	TXDOT SPEC.	DESCRIPTION	QTY (+/-)	U/M	UNIT COST	EXTENDED COST
Woodrow Phase 2							
1	1020	0100 6002	PREPARING ROW	123	STA	\$	\$
2	1020	0100 6006	PREP ROW (TREE)(LESS THAN 24" DIA)	4	EA	\$	\$
3	1020	0100 6007	PREP ROW (TREE)(GREATER THAN 24" DIA)	6	EA	\$	\$
4		0104 6001	REMOVING CONC (PAV)	998	SY	\$	\$
5		0104 6009	REMOVING CONC (RIPRAP)	13	SY	\$	\$
6		0104 6017	REMOVING CONC (DRIVEWAYS)	4322	SY	\$	\$
7		0104 6022	REMOVING CONC (CURB AND GUTTER)	218	LF	\$	\$
8		0110 6001	EXCAVATION (ROADWAY)	81054	CY	\$	\$
9		0110 6002	EXCAVATION (CHANNEL)	5697	CY	\$	\$
10		0132 6006	EMBANKMENT (FINAL)(DENS CONT)(TY C)	375	CY	\$	\$
11	1356	0160 6003	FURNISHING AND PLACING TOPSOIL (4")	50245	SY	\$	\$
12	1356	0164 6021	CELL FBR MLCH SEED(PERM)(RURAL)(SANDY)	50245	SY	\$	\$
13	1356	0164 6029	CELL FBR MLCH SEED(TEMP)(WARM)	25122.5	SY	\$	\$
14	1356	0164 6031	CELL FBR MLCH SEED(TEMP)(COOL)	25122.5	SY	\$	\$
15	1356	0164 6034	DRILL SEEDING (PERM) (RURAL) (SANDY)	3.28	AC	\$	\$
16	1356	0166 6001	FERTILIZER	10	AC	\$	\$
17	1356	0168 6001	VEGETATIVE WATERING	846	MG	\$	\$
18	1356	0169 6007	SOIL RETENTION BLANKETS (CL 2) (TY G)	11410	SY	\$	\$
19		0216 6001	PROOF ROLLING	85	HR	\$	\$
20		0247 6204	FL BS (CMP IN PLC)(TY E GR 4)(8")	82791	SY	\$	\$
21		0275 6001	CEMENT	74	TON	\$	\$
22		0275 6002	CEMENT TREAT (EXIST MATL) (6")	8761	SY	\$	\$
23		0310 6009	PRIME COAT (MC-30)	14649	GAL	\$	\$
24		0315 6004	FOG SEAL (CSS-1H)	10987	GAL	\$	\$
25		0351 6013	FLEXIBLE PAVEMENT STRUCTURE REPAIR(4")	1300	SY	\$	\$
26		0354 6005	PLAN & TEXT ASPH CONC PAV(2" TO 4")	35244	SY	\$	\$
27		0360 6002	CONC PVMT (CONT REINF - CRCP) (8")	6726	SY	\$	\$
28		0360 6080	CONC PVMT (CRCP) (TRANSITION SLAB)	148	SY	\$	\$

29		0416 6002	DRILL SHAFT (24 IN)	36	LF	\$	\$
30		0432 6001	RIPRAP (CONC)(4 IN)	976	CY	\$	\$
31		0432 6002	RIPRAP (CONC)(5 IN)	47	CY	\$	\$
32		0432 6022	RIPRAP (STONE COMMON)(DRY)(6 IN)	32	CY	\$	\$
33		0432 6055	RIPRAP (STONE TY F) (DRY) (18")	20	CY	\$	\$
34		0460 6002	CMP (GAL STL 18 IN)	200	LF	\$	\$
35		0460 6003	CMP (GAL STL 24 IN)	70	LF	\$	\$
36		0462 6099	CONC BOX CULV (6 FT X 2 FT)	1332	LF	\$	\$
37		0465 6012	JCTBOX(COMPL)(PJB)(8FTX8FT)	1	EA	\$	\$
38		0465 6128	INLET (COMPL)(PSL)(FG)(4FTX4FT-4FTX4FT)	1	EA	\$	\$
39		0467 6207	SET (TY I)(S= 6 FT)(HW= 3 FT)(6:1) (C)	2	EA	\$	\$
40		0467 6208	SET (TY I)(S= 6 FT)(HW= 3 FT)(6:1) (P)	28	EA	\$	\$
41		0467 6346	SET (TY II) (18 IN) (CMP) (4: 1) (P)	4	EA	\$	\$
42		0467 6377	SET (TY II) (24 IN) (CMP) (4: 1) (C)	4	EA	\$	\$
43		0480 6001	CLEAN EXIST CULVERTS	16	EA	\$	\$
44		0496 6016	REMOV STR (PIPE)	10	EA	\$	\$
45	1020	0500 6001	MOBILIZATION	1	LS	\$	\$
46	1356	0506 6002	ROCK FILTER DAMS (INSTALL) (TY 2)	80	LF	\$	\$
47	1356	0506 6011	ROCK FILTER DAMS (REMOVE)	80	LF	\$	\$
48A	1356	0506 6020	CONSTRUCTION EXITS (INSTALL)(TY 1)	500	SY	\$	\$
48	1356	0506 6024	CONSTRUCTION EXITS (REMOVE)	500	SY	\$	\$
49	1356	0506 6042	BIODEG EROSN CONT LOGS (INSTL) (18")	1070	LF	\$	\$
50	1356	0506 6043	BIODEG EROSN CONT LOGS (REMOVE)	1070	LF	\$	\$
51		0508 6001	CONSTRUCTING DETOURS	36990	SY	\$	\$
52		0529 6008	CONC CURB & GUTTER (TY II)	17915	LF	\$	\$
53		0529 6012	CONC CURB (SLOTTED)	618	LF	\$	\$
54		0529 6021	CONC CURB & GUTTER (SLOTTED)	270	LF	\$	\$
55		0529 6030	CONC CURB & GUTTER (VALLEY GUTTER)	80	LF	\$	\$
56		0530 6001	INTERSECTIONS (CONC)	94	SY	\$	\$
57		0530 6004	DRIVEWAYS (CONC)	8587	SY	\$	\$
58		0530 6007	TURNOUTS (CONC)	770	SY	\$	\$
59		0531 6001	CONC SIDEWALKS (4")	2600	SY	\$	\$
60		0531 6013	CURB RAMPS (TY 10)	2	EA	\$	\$
61		0536 6002	CONC MEDIAN	522	SY	\$	\$
62		0560 6001	MAILBOX INSTALL-S (TWG-POST) TY 1	60	EA	\$	\$
63		0644 6001	IN SM RD SN SUP&AM TY10BWG(1)SA(P)	20	EA	\$	\$

64		0644 6002	IN SM RD SN SUP&AM TY10BWG(1)SA(P-BM)	4	EA	\$	\$
65		0644 6004	IN SM RD SN SUP&AM TY10BWG(1)SA(T)	4	EA	\$	\$
66		0644 6076	REMOVE SM RD SN SUP&AM	14	EA	\$	\$
67		0666 6036	REFL PAV MRK TY I (W)8"(SLD)(100MIL)	5662	LF	\$	\$
68		0666 6042	REFL PAV MRK TY I (W)12"(SLD)(100MIL)	935	LF	\$	\$
69		0666 6306	RE PM W/RET REQ TY I (W)6"(BRK)(100MIL)	443	LF	\$	\$
70		0666 6309	RE PM W/RET REQ TY I (W)6"(SLD)(100MIL)	5054	LF	\$	\$
71		0666 6318	RE PM W/RET REQ TY I (Y)6"(BRK)(100MIL)	4281	LF	\$	\$
72		0666 6321	RE PM W/RET REQ TY I (Y)6"(SLD)(100MIL)	22421	LF	\$	\$
73		0668 6018	PREFAB PAV MRK TY B (W)(24")(SLD)	592	LF	\$	\$
74		0668 6019	PREFAB PAV MRK TY B (W)(ARROW)	20	EA	\$	\$
75		0668 6020	PREFAB PAV MRK TY B (W)(DBL ARROW)	2	EA	\$	\$
76		0672 6007	REFL PAV MRKR TY I-C	280	EA	\$	\$
77		0672 6009	REFL PAV MRKR TY II-A-A	1714	EA	\$	\$
78		0678 6001	PAV SURF PREP FOR MRK (4")	1580	LF	\$	\$
79		0678 6004	PAV SURF PREP FOR MRK (8")	901	LF	\$	\$
80		0678 6006	PAV SURF PREP FOR MRK (12")	112	LF	\$	\$
81		0678 6008	PAV SURF PREP FOR MRK (24")	334	LF	\$	\$
82		0678 6009	PAV SURF PREP FOR MRK (ARROW)	6	EA	\$	\$
83		0685 6004	INSTL RDSD FLSH BCN ASSM (SOLAR PWRD)	6	EA	\$	\$
84	1356	0730 6107	FULL -WIDTH MOWING	2	CYC	\$	\$
85		3076 6009	D-GR HMA TY-B PG70-28 (4")	16850	TON	\$	\$
86		3076 6030	D-GR HMA TY C PG70-28 (2")	8427	TON	\$	\$
87		3076 6045	D-GR HMA TY-D PG70-28	961	TON	\$	\$
88		3080 6029	TACK COAT	14649	GAL	\$	\$
89	1020-1		TRAFFIC CONTROL	1	LS	\$	\$
90	1020-2		MISCELLANEOUS PROJECT ALLOWANCE (MPA)	1	LS	\$ 100,000.00	\$ 100,000.00
			Base Bid Total				
Alternative 1 - Drainage Storm Sewer							
AB1-1		0104 6010	REMOVING CONC (RIPRAP)	0.8	CY	\$	\$
AB1-2	1020	0500 6001	MOBILIZATION		LS	\$	\$
AB1-3		4026 6001	THERMOPLASTIC PIPE (18)(HDPE)	150	LF	\$	\$
AB1-4	1020-3		SLICK BORE (HDPE)(COMPLETE FURNISH AND INSTAL	150	LF	\$	\$
AB1-5	1020-4		24" CATCH BASIN W/DOMED CAST IRON GRATE ASSEMBLY (COMPLETE)	1	EA	\$	\$
AB1-6		0432 6001	4" CONC RIPRAP	1.5	CY	\$	\$

			Alternative 1 Total	\$	-
--	--	--	---------------------	----	---

Alternative 2 - CR 2330							
AB2-1	1020	0100 6002	PREPARING ROW	10	STA	\$	\$
AB2-2		0104 6009	REMOVING CONC (RIPRAP)	8	SY	\$	\$
AB2-3		0104 6017	REMOVING CONC (DRIVEWAYS)	2247	SY	\$	\$
AB2-4		0110 6002	EXCAVATION (CHANNEL)	1810	CY	\$	\$
AB2-5		0110 6001	EXCAVATION (ROADWAY)	8045	CY	\$	\$
AB2-6		0132 6006	EMBANKMENT (FINAL)(DENS CONT)(TY C)	127	CY	\$	\$
AB2-7	1356	0160 6003	FURNISHING AND PLACING TOPSOIL (4")	7204	SY	\$	\$
AB2-8	1356	0164 6021	CELL FBR MLCH SEED(PERM)(RURAL)(SANDY)	7204	SY	\$	\$
AB2-9	1356	0164 6029	CELL FBR MLCH SEED(TEMP)(WARM)	3602	SY	\$	\$
AB2-10	1356	0164 6031	CELL FBR MLCH SEED(TEMP)(COOL)	3602	SY	\$	\$
AB2-11	1356	0164 6034	DRILL SEEDING (PERM) (RURAL) (SANDY)	2.25	AC	\$	\$
AB2-12	1356	0166 6001	FERTILIZER	1.49	AC	\$	\$
AB2-13	1356	0168 6001	VEGETATIVE WATERING	121	MG	\$	\$
AB2-14		0216 6001	PROOF ROLLING	12	HR	\$	\$
AB2-15		0247 6060	FL BS (CMP IN PLC)(TY E GR 4)(8")	11680	SY	\$	\$
AB2-16		0275 6001	CEMENT	19	TON	\$	\$
AB2-17		0275 6002	CEMENT TREAT (EXIST MATL) (6")	2110	SY	\$	\$
AB2-18		0310 6009	PRIME COAT (MC-30)	2044	GAL	\$	\$
AB2-19		0315 6004	FOG SEAL (CSS-1H)	1533	GAL	\$	\$
AB2-20		0351 6013	FLEXIBLE PAVEMENT STRUCTURE REPAIR(4")	650	SY	\$	\$
AB2-21		0354 6005	PLAN & TEXT ASPH CONC PAV(2" TO 4")	6229	SY	\$	\$
AB2-22		0360 6002	CONC PVMT (CONT REINF - CRCP) (8")	1690	SY	\$	\$
AB2-23		0360 6080	CONC PVMT (CRCP) (TRANSITION SLAB)	31	SY	\$	\$
AB2-24		0432 6001	RIPRAP (CONC)(4 IN)	22	CY	\$	\$
AB2-25		0432 6055	RIPRAP (STONE TY F) (DRY) (18")	63	CY	\$	\$
AB2-26		0464 6017	RC PIPE (CL IV) (18 IN)	90	LF	\$	\$
AB2-27		0479 6001	ADJUSTING MANHOLES	8	EA	\$	\$
AB2-28		0496 6016	REMOV STR (PIPE)	14	EA	\$	\$
AB2-29	1020	0500-6001	MOBILIZATION	1	LS	\$	\$
AB2-30	1356	0506 6042	BIODEG EROSN CONT LOGS (INSTL) (18")	411	LF	\$	\$
AB2-31	1356	0506 6043	BIODEG EROSN CONT LOGS (REMOVE)	411	LF	\$	\$
AB2-32		0529 6008	CONC CURB & GUTTER (TY II)	3396	LF	\$	\$
AB2-33		0529 6021	CONC CURB (SLOTTED)	114	LF	\$	\$

AB2-34		0529 6030	CONC CURB & GUTTER (VALLEY GUTTER)	109	LF	\$	\$
AB2-35		0530 6004	DRIVEWAYS (CONC)	2106	SY	\$	\$
AB2-36		0531 6001	CONC SIDEWALKS (4")	1855	SY	\$	\$
AB2-37		0531 6005	CURB RAMPS (TY 2)	2	EA	\$	\$
AB2-38		0536 6002	CONC MEDIAN	59	SY	\$	\$
AB2-39		0560 6001	MAILBOX INSTALL-S (TWG-POST) TY 1	7	EA	\$	\$
AB2-40		0644 6001	IN SM RD SN SUP&AM TY10BWG(1)SA(P)	4	EA	\$	\$
AB2-41		0666 6036	REFL PAV MRK TY I (W)8"(SLD)(100MIL)	532	LF	\$	\$
AB2-42		0666 6042	REFL PAV MRK TY I (W)12"(SLD)(100MIL)	118	LF	\$	\$
AB2-43		0666 6309	RE PM W/RET REQ TY I (W)6"(SLD)(100MIL)	200	LF	\$	\$
AB2-44		0666 6318	RE PM W/RET REQ TY I (Y)6"(BRK)(100MIL)	780	LF	\$	\$
AB2-45		0666 6321	RE PM W/RET REQ TY I (Y)6"(SLD)(100MIL)	3116	LF	\$	\$
AB2-46		0668 6018	PREFAB PAV MRK TY B (W)(24")(SLD)	38	LF	\$	\$
AB2-47		0668 6019	PREFAB PAV MRK TY B (W)(ARROW)	31	EA	\$	\$
AB2-48		0672 6009	REFL PAV MRKR TY II-A-A	313	EA	\$	\$
AB2-49		0678 6004	PAV SURF PREP FOR MRK (8")	529	LF	\$	\$
AB2-50		3076 6009	D-GR HMA TY-B PG70-28 (4")	2351	TON	\$	\$
AB2-51		3076 6045	D-GR HMA TY-D SAC-A PG70-28	134	TON	\$	\$
AB2-52		3079 6029	TACK COAT	2043	GAL	\$	\$
AB2-53	1020-1		TRAFFIC CONTROL	1	LS	\$	\$
			Alternative 2 Total				\$ -
Woodrow Phase 2 Bid Options							
Option 1 - Base Bid Only (= Base Bid Total)						\$	-
Option 2 - Base Bid and Alternative 1 (= Option 1 + Alternative 1 Total)						\$	-
Option 3 - Base Bid and Alternative 2 (= Option 1 + Alternative 2 Total)						\$	-
Option 4 - Base Bid, Alternative 1, and Alternative 2 (= Option 1 + Alternative 1 Total + Alternative 2 Total)						\$	-